

# *PT10L100SP*

## PFC Device Corporation

## 10A 100V HPTR<sup>®</sup> Schottky Rectifier

## Major ratings and characteristics


Characteristics	Values	Units	
I <sub>F(AV)</sub> Rectangular	10	А	
Waveform	10		
V <sub>RRM</sub>	100	V	
V <sub>F</sub> @ 10A <i>,</i> Tj=125 <sup>°</sup> C	0.65	V, typ.	
T <sub>J</sub> Operating Junction	40 to 1150	°C	
Temperature	-40 to +150		

### Features

- Super Low Forward Voltage (SLVF<sup>®</sup>) Drop
- Reliable High Temperature Operation
- Softest, fast switching capability
- 150°C Operating Junction Temperature
- Lead Free Finish, RoHS Compliant
- Green Molding Compound (No Br, Sb)

## **Typical Applications**

Device optimized for low forward voltage drop to maximize efficiency in Power Supply applications

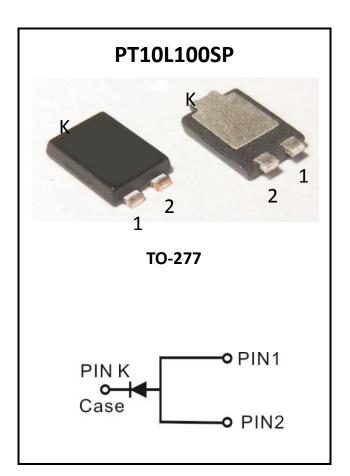

### **1.** Characteristics

Parameter	Symbol	Values	Units
DC Blocking Voltage	V <sub>RM</sub>		
Working Peak Reverse Voltage	V <sub>RWM</sub>	100	Volts
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>		
Average Rectified Forward Current Per device	l <sub>o</sub>	10	Amps
Peak Forward Surge Current - 1/2 60hz	I <sub>FSM</sub>	140	Amps
Peak Repetitive Reverse Surge Current (2uS-1Khz)	I <sub>RRM</sub>	1	Amps
Typical Thermal Resistance			
Thermal Resistance junction to Ambient Note (1)	Rθ <sub>JA</sub>	72	°C / W
Thermal Resistance junction to Ambient Note (2)	Rθ <sub>JA</sub>	30	
Maximum Rate of Voltage Change ( at Rated VR )	dv/dt	10000	V/uS
Operating Junction Temperature	Tj	- 40 to +150	°C
Storage Junction Temperature	T <sub>STG</sub>	- 40 to +150	Ľ

**Electrical Characteristics** - (per leg)  $(T_A = 25 \degree C \text{ unless otherwise specified})$ 

Parameter	Test Conditions		Symbol	Тур.	Max.	Units
Instantaneous	IF = 5 A	T <sub>J</sub> = 25 °C		0.59		
Forward Voltage	IF = 10 A	$I_{J} = 25 C$	VF*	0.75	0.79	Volto
	IF = 5 A	T 125 °C	VF	0.53		- Volts
	IF = 10 A	T <sub>J</sub> = 125 °C		0.65	0.69	
Instantaneous	VR=70V			2.0		uA
Reverse Current	VR=100V	T <sub>J</sub> = 25 <sup>o</sup> C	<b>*</b> חו	5	100	uA
	VR=70V	- T <sub>J</sub> = 125 °C	- IR* -	4		mA
	VR=100V			7	20	mA

\* Pulse width < 300 uS, Duty cycle < 2%

Note 1. FR-4 PCB, 2 oz Copper. Minimum recommended pad layout


Note 2. Polymide PCB, 2 oz Copper. Cathode pad dimensions 18.8x14.4mm , Anode pad dimensions- (5.6x14.4mm)



2/5

#### 2. Characteristics Curves

Ratings and Characteristics Curves








Figure 3: Typical Forward Voltage

( TA =  $25^{\circ}$ C unless otherwise specified )




Figure 2: Typical Junction Capacitance





Figure 4: Typical Reverse Current



### 3. Marking information


**Top Marking Rule** 




T10L100 = Product Type Marking Code YM = Date Code Y = Last one digits of year M = Month code A = Assembly Code S = Series Number

#### 4. Package information

Suggested Package Outline Dimensions millimeters

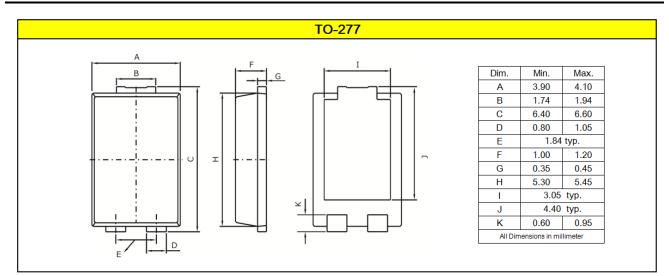

#### Mounting pad Outline Dimensions millimeters






Version 4.2

#### 5. Packing and Ordering information

#### Packing information millimeters

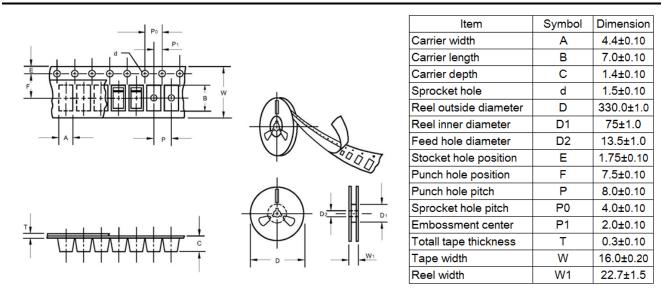

#### **Ordering information**

Part Number	Package	Base Quantity	Delivery mode
PT10L100SP	TO-277	5000	13" diameter plastic tape and reel

#### Mechanical

- Molder Plastic: UL Flammability Classification Rating 94V-0
- Device Weight : 0.003 ounces (0.093grams) TO-277

PFC Device Corp reserves the right to make changes without further notice to any products herein. PFC Device Corp makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does PFC Device Corp assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in PFC Device Corp data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical" must be validated for each customer application by customer's technical experts. PFC Device Corp does not convey any license under its patent rights nor the rights of others. PFC Device Corp products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the PFC Device Corp product could create a situation where personal injury or death may occur. Should Buyer purchase or use PFC Device Corp products for any such unintended or unauthorized application, Buyer shall indemnify and hold PFC Device Corp and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that PFC Device Corp was negligent regarding the design or manufacture of the part.



Version 4.2

5/5